


ISO 7045 Pan Phillips  
Helical Split L/W

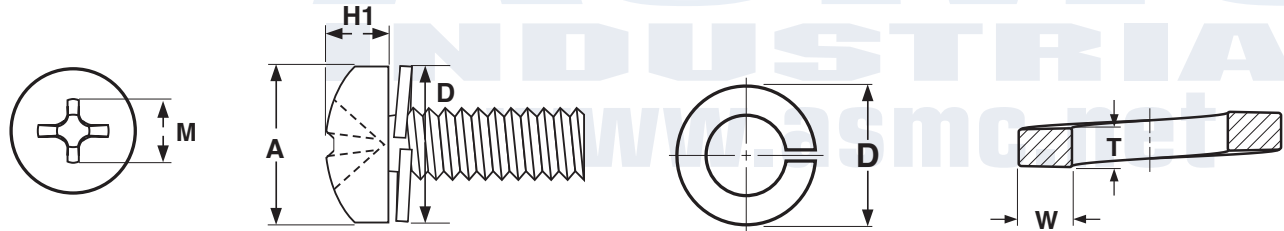

METRIC - ISO 7045 PAN PHIL SPLIT LOCKWASHER SEMS											ISO 7045 ASME B18.13.1M
Machine Screw Dimensions							Split Lockwasher Dimensions				Phillips Driver Size
Nominal Size	Thread Pitch	A		H1		M	D		T	W	
		Head Diameter		Height of Head		Recess Diameter	Outside Diameter		Thickness	Width	
		Max	Min	Max	Min	Ref	Max	Min	Min	Min	
M2	0.4	4	3.7	1.6	1.46	2.2	3.7	-	0.60	-	1
M2.5	0.45	5	4.7	2.1	1.96	2.70	4.81	4.60	0.79	1.19	1
M3	0.5	5.6	5.3	2.40	2.26	3	5.73	5.49	1.02	1.40	1
M4	0.7	8	7.64	3.1	2.92	4.4	7.00	6.74	1.19	1.57	2
M5	0.8	9.5	9.14	3.7	3.52	4.9	8.34	8.08	1.42	1.78	2
Tolerance on Length							over 3mm to 6mm		± 0.24		
							over 6mm to 10mm		± 0.29		
							over 10mm to 18 mm		±0.35		
							over 18mm to 30 mm		±0.42		

<b>Description</b>	A cross-recessed, pan head machine screw with a free-spinning, captive, helical split lockwasher.	
<b>Applications/ Advantages</b>	The washer/screw assembly makes this a locking screw with the washer providing the locking action. Machine pre-assembly provides cost savings to the end user. The split lockwasher variety is preferred for use with hardened bearing surfaces.	
<b>Material</b>	<i>Steel</i> Screw: C1008 or equivalent carbon steel Washer: Spring Steel	<i>Stainless</i> Screw: Class 304 SS Washer: Class 304 SS
<b>Hardness</b>	Screw: Rockwell B 67 minimum Washer: HV 430 - 530	
<b>Tensile Strength</b>	400 N/mm <sup>2</sup> (applies to screws with a minimum nominal length of 2.5d (where d is the nominal diameter of the screw))	
<b>Plating</b>	Sems are available in a clear zinc finish and baked after plating.	Stainless sems are usually supplied without a secondary finish.