


SPRING NUTS

U-Type

TINNERMAN® NUT ALTERNATIVES

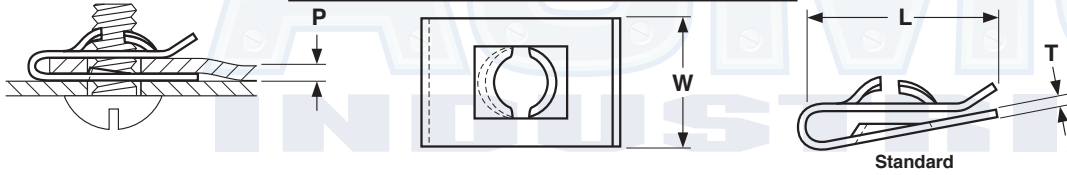

STEEL SPRING NUTS "U" TYPE							SAE J891, Tinnerman® Palnut		
Industry Part Number	Screw Size	P	L	W	D	T	PERFORMANCE DATA		
		Panel Range	Length	Width	Distance Center of Hole to Edge	Material Thickness	Recommended Installation Torque (lb.-in.)	Ultimate Tensile Strength (lb.)	
							Max	Min	
C9029-4	4A or B	.036-.047	.37	.31	.200	.020	9	300	
C8090-632-4	6-32	.025-.040	.48	.50	.218	.017	6	156	
C8091-632-4	6-32	.045-.062	.48	.50	.218	.017	6	156	
C8092-632-4	6-32	.025-.040	.64	.31	.296	.017	6	156	
C8093-632-4	6-32	.045-.062	.65	.31	.296	.017	6	156	
C8094-632-4	6-32	.025-.040	.82	.31	.468	.017	6	156	
C8095-632-4	6-32	.045-.062	.82	.31	.468	.017	6	156	
C8096-6-4	6A or B	.025-.040	.48	.50	.218	.025	12	425	
C8097-6-4	6A or B	.045-.062	.47	.50	.218	.025	12	425	
C8099-6-4	6A or B	.045-.062	.65	.31	.296	.025	12	425	
C8100-6-4	6A or B	.025-.040	.81	.31	.468	.025	12	425	
C8102-832-4	8-32	.025-.040	.52	.50	.234	.017	8	189	
C8103-832-4	8-32	.045-.062	.52	.50	.234	.017	8	189	
C8104-832-4	8-32	.025-.040	.69	.41	.328	.017	8	189	
C8105-832-4	8-32	.045-.062	.67	.41	.328	.017	8	189	
C8106-832-4	8-32	.025-.040	.86	.41	.515	.017	8	189	
C8107-832-4	8-32	.045-.062	.87	.41	.515	.017	8	189	
C14783-832-4	8-32	.051-.064	.46	.50	.187	.017	8	189	
C8108-8-4	8A or B	.025-.040	.52	.50	.234	.028	20	534	
C8109-8-4	8A or B	.045-.062	.52	.50	.234	.028	20	534	
C8110-8-4	8A or B	.025-.040	.69	.41	.328	.028	20	534	
C8112-8-4	8A or B	.025-.040	.85	.41	.515	.028	20	534	
C8113-8-4	8A or B	.045-.062	.86	.41	.515	.028	20	534	
C8114-1024-4	10-24	.025-.040	.58	.63	.203	.022	14	274	
C8115-1024-4	10-24	.045-.062	.56	.63	.250	.022	14	274	
C8116-1024-4	10-24	.025-.040	.76	.38	.359	.022	14	274	
C8117-1024-4	10-24	.045-.062	.76	.38	.359	.022	14	274	
C8118-1024-4	10-24	.025-.040	.95	.38	.562	.022	14	274	
C8119-1024-4	10-24	.045-.062	.95	.38	.562	.022	14	274	
C8120-10-4	10A or B	.025-.040	.56	.63	.250	.031	35	672	
C8121-10-4	10A or B	.045-.062	.56	.63	.250	.031	35	672	
C8123-10-4	10A or B	.045-.062	.76	.50	.359	.031	35	672	
C8124-10-4	10A or B	.025-.040	.96	.50	.562	.031	35	672	
C8125-10-4	10A or B	.045-.062	.95	.50	.562	.031	35	672	
C1303-1420-4	1/4-20	.064-.125	.97	.50	.500	.025	35	570	
C7343-1420-4	1/4-20	.062-.125	.96	.50	.500	.025	35	570	

Description	A self-retaining spring steel nut manufactured in the shape of a "U", enabling it to snap into place over the edge of a panel and hold its position.
Applications/Advantages	Same advantages as a J-Type nut, but used where the lower leg of the spring nut requires full bearing.
Material	SAE 1050 or higher carbon steel.
Hardness	For material thickness 0.017-0.024 in., Rockwell 30N C40 minimum, C50 maximum. For material thickness 0.025-0.039 in., Rockwell 45N C40 minimum, C50 maximum.
Plating	See Appendix-A for information on the plating of steel spring nuts.

Tinnerman® is a registered trademark of A.Raymond ET CIE. Kanebridge's spring nuts are not manufactured by or connected with the producers of Tinnerman® nuts.