


TYPE-17 EXTERIOR—STAINLESS

**Flat Head w/
Six-Lobe Recess**

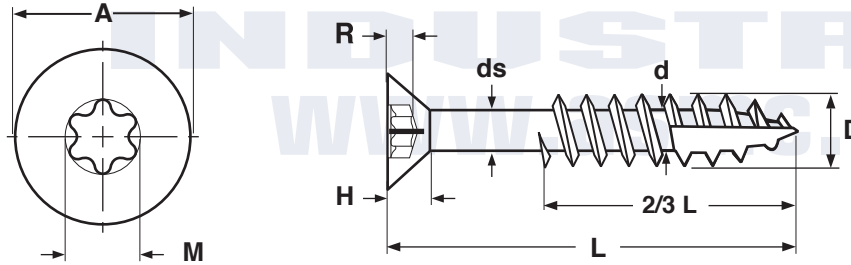

FLAT SIX-LOBE RECESS EXTERIOR SCREW WITH TYPE-17 POINT—STAINLESS

Nominal Diameter	A		H	R		M	D		d		ds	Recess Size
	Head Diameter		Head Height	Recess Depth		Recess Diameter	Major Diameter		Minor Diameter		Upper Shank Diameter	
	Max	Min	Ref	Max	Min	Ref	Max	Min	Max	Min	Ref	
6	0.275	0.247	0.083	0.059	0.051	0.132	0.162	0.153	0.101	0.092	0.114	T-15
8	0.328	0.295	0.100	0.075	0.062	0.155	0.181	0.172	0.112	0.104	0.126	T-20
10	0.381	0.335	0.116	0.087	0.074	0.178	0.203	0.190	0.128	0.119	0.141	T-25
12	0.433	0.392	0.131	0.102	0.082	0.195	0.238	0.225	0.154	0.145	0.169	T-25
Tolerance on Length	Up to 1.25"						+0 / -0.05"					
	Over 1.25 to 2.5"						+0 / -0.06"					
	Over 2.5 to 4"						+0 / -0.09"					

Description	An externally threaded fastener with a countersunk head, six-lobed recess, a single lead thread. The shank has a reduced diameter and a chip cavity cut out where the final several threads end at the tip.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces. The six-lobe recess transmits drive torque with less required downward pressure.
Material	18-8 Stainless
Plating	Stainless Exterior screws typically are provided without any additional supplemental finish.